

CoCrMo alloy

for ProX™ 100, 200 and 300 Direct Metal Printers

Metal powder for additive manufacturing of highly corrosion-resistant industrial parts that require high temperature resistance




Technical Data

Chemical Composition

Ni-free alloy.¹

Element	% of weight
Co	Balance
Cr	28.0 - 30.0
Mo	5.0 - 6.0
Si	0.0 - 1.0
Mn	0.0 - 1.0
Fe	0.0 - 0.50
C	0.0 - 0.02

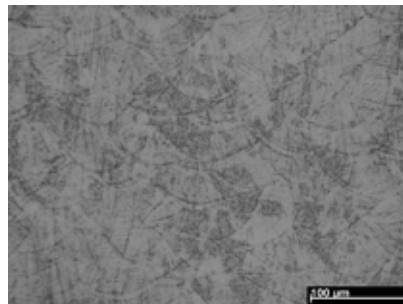

CoCrMo part microstructure after recommended heat treatment

Mechanical Properties²

	Condition	As-built ³	After post heat treatment ⁴
Ultimate Tensile Strength, MPa	ASTM E8	1200 ± 100	1260 ± 100
Yield Strength, MPa	ASTM E8	850 ± 100	900 ± 100
Elongation at break, %	ASTM E8	10 ± 2	15 ± 2
Hardness		na	500 ± 20 HV5
Density		approx. 100%	

¹ This chemical composition is suitable for biomedical applications

² Parts built on a ProX 200 Direct Metal Production Printer

³ As-built refers to the state of components built on the ProX 200 Direct Metal Printer before any post processing except removal from the build platform


⁴ Recommended post heat treatment at 800 °C for 1h (exact time dependent on part volume)

Applications

- Turbine and engine components
- Design and watchmaking products
- Parts with thin walls or fine features
- Mechanical components needing wear and corrosion resistance

Features

- High strength
- Excellent wear resistance
- Good elasticity
- Good corrosion resistance
- High temperature resistance



3DSYSTEMS®

UK
Tel: +44 1442 282 600
info@3dsystems-europe.com

**Germany, Scandinavia,
Eastern Europe, Middle East**
Tel: +49 6151 357 0
info@3dsystems-europe.com

USA
Tel: +1 803.326.3900
moreinfo@3dsystems.com

Asia-Pacific
Melbourne Tel: +61 3 9819 4422
Sydney Tel: +61 2 9516 5571
3dprinters.asiapac@3dsystems.com

MANUFACTURING THE FUTURE